# '08

Chimeney and cooker hoods catalogue

FAGOR

# chimneys/cooker hoods'

chimneys' p.62
cooker hoods' p.65
canopy hoods' p.67

FAGOR

# style’

in the kitchen, it always matters

exclusive fagor

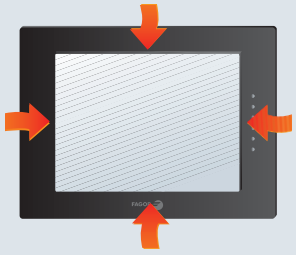

## New perimeter extraction system.

### Always aspiring to more with Fagor.

With this new model of chimney, we offer a new system of smoke extraction, in which the smoke is very effectively drawn in around the perimeter of the central stainless steel zone.

### Easier to clean.

The new system of perimeter extraction, combined with the materials this new chimney is made of – glass and stainless steel – and its touch controls, make it easier and more convenient to clean.

FAGOR

# chimney with an **innovative design**

## Improves the style of your kitchen.

For people who care about their kitchens having a stylish look, this new Fagor chimney with its cutting-edge design is the ideal solution.

# aspiring to maximum silence’

## new **deep** models with the **eds3** silencer system

The quietest in the market

35 dBA

Fagor’s Deep chimneys barely reach a noise level of 35 dBA on the lowest setting, making them the quietest in the market.

## **silence** inside

The best balance between effective extraction and silence

Silence Inside

The new Fagor chimneys ensure peace and quiet in your home. They have managed to attain the perfect balance between effective extraction and the noise it creates, achieve significantly lower noise levels.

### Clean Filter alarm.
**The chimney warns us when it needs cleaning.**

The chimney, through a warning light in the control panel, automatically informs us when it is necessary to clean the filters.

### Automatic shut-off.
**They keep energy consumption to a minimum.**

After a certain time, both the chimney's motor and its light turn off automatically. In this way, the amount of energy consumed in the home is reduced.

### Heat, humidity and heat-temperature sensors.
**They work on their own.**

Thanks to these sensors, when the chimney detects a source of heat or a high level of humidity, it switches on its extractor.

heat/humidity sensor

heat/temperature sensor

### New bridge design.
**Fit in with the most modern kitchen styles.**

The external structure and the control panels have a new feeling of style, cleaner and blending in with new kitchen designs.

### Modular filters.
**Clean on the outside, clean on the inside.**

These filters consist of various layers of metal meshing designed to last indefinitely. They are easy to remove and, thanks to their size, can be washed in the dishwasher. A pilot light indicates when the filter needs cleaning.

# Chimneys

| Model and EAN | Specifications | Diagrams and measurements |
|---|---|---|
| <br>**3CFT-90 V Isla**<br>**glass**<br>EAN-13: 8413880089331<br>Silence inside · high power | Island, 100 cm<br>• Extraction motor: 920 m³/h free outlet<br>• At 15 Pa pressure according to the UNE-EN-61591: 740 m³/h<br>• 3 extraction speeds + 1 intensive speed<br>• Electronic Touch Controls<br>• Interior motor locking (easy-to-clean)<br>• Filter saturation LEDs<br>• Halogen lighting (4 halogen lamps)<br>• 1 easy-to-clean multi-layer modular metallic filter<br>• Carbon filter (optional) | 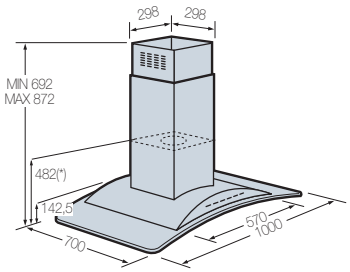 |
| <br>**5CFB-100 X Isla**<br>**stainless steel**<br>EAN-13: 8413880142630<br>Silence inside · high power | Island, 100 cm<br>• Extraction motor: 870 m³/h free outlet<br>• At 15 Pa pressure according to the UNE-EN-61591: 670 m³/h<br>• 3 extraction speeds + 1 intensive speed<br>• Automatic stop after 5 minutes at intensive speed<br>• Electronic Touch Controls<br>• Interior motor locking (easy-to-clean)<br>• LED Indicators (speeds, timing and filter saturation)<br>• Automatic shut-off<br>• Halogen lighting (4 halogen lamps)<br>• 3 easy-to-clean multi-layer modular metallic filters<br>• Carbon filter (optional) |  |
| <br>**3CFT-TILE** new<br>**stainless steel and glass**<br>EAN-13: 8413880157061<br>Silence inside | • Type of extraction: perimeter<br>• Extraction motor: 1,050 m³/h free outlet<br>• At 15 Pa pressure according to the UNE-EN-61591 standard: 660 m³/h<br>• 3 extraction speeds + 1 intensive speed<br>• Electronic Touch Controls<br>• Filter saturation LEDs<br>• Halogen lighting (2 halogen lamps)<br>• Multi-layer modular metallic filters<br>• Includes carbon filter | 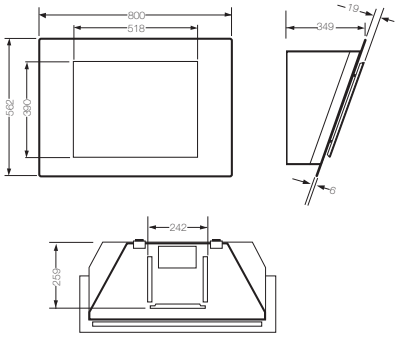 |
| <br>**3CFT-DEEP90 X** new<br>**stainless steel**<br>EAN-13: 8413880161945<br>Silence inside · 35 dBA noise level · EDS3 DeepSilence | Wall-mounted, 90 cm<br>• Extraction motor: 900 m³/h free outlet<br>• At 15 Pa pressure according to the UNE-EN-61591 standard: 820 m³/h<br>• 3 extraction speeds + 1 intensive speed<br>• Electronic Touch Controls<br>• LCD display with filter saturation indicator and timer<br>• 1 easy-to-clean circular multi-layer modular metallic filter<br>• Automatic shut-off<br>• Halogen lighting (2 halogen lamps)<br>• Carbon filter (optional) |  |

Heights given in mm.
(*) Maximum height for motor location.

| Model and EAN | Specifications | Diagrams and measurements |
|---|---|---|
| <br>**3CFT-9 BRS X**<br>**stainless steel**<br>EAN-13: 8413880153155<br>heat/temperature sensor · Silence · high power | Wall-mounted, 90 cm<br>• Extraction motor: 810 m³/h free outlet<br>• At 15 Pa pressure according to the UNE-EN-61591: 655 m³/h<br>• 3 extraction speeds + 1 intensive speed<br>• Heat and temperature sensors<br>• Electronic Touch Controls<br>• Filter saturation LEDs<br>• Automatic shut-off<br>• Halogen lighting (2 halogen lamps)<br>• 1 filtro modular en stainless steel<br>• Carbon filter (optional) |  |
| <br>**3CFT-9 S X**<br>**stainless steel**<br>EAN-13: 8413880152042<br>heat/humidity sensor · Silence | Wall-mounted, 90 cm<br>• Extraction motor: 800 m³/h free outlet<br>• At 15 Pa pressure according to the UNE-EN-61591: 640 m³/h<br>• 3 extraction speeds + 1 intensive speed<br>• Heat and temperature sensors<br>• Electronic Touch Controls<br>• Filter saturation LEDs<br>• Automatic shut-off<br>• Halogen lighting (2 halogen lamps)<br>• Filtros modulares multicapa de fácil limpieza<br>• Carbon filter (optional) |  |
| <br>**3CFT-90 V**<br>**glass**<br>EAN-13: 8413880089324<br>Silence · high power | Wall-mounted, 90 cm<br>• Extraction motor: 920 m³/h free outlet<br>• At 15 Pa pressure according to the UNE-EN-61591: 740 m³/h<br>• 3 extraction speeds + 1 intensive speed<br>• Electronic Touch Controls<br>• Interior motor locking (easy-to-clean)<br>• Filter saturation LEDs<br>• Halogen lighting (2 halogen lamps)<br>• 1 easy-to-clean multi-layer modular metallic filter<br>• Carbon filter (optional) |  |
| <br>**3CFT-MAYA**<br>**stainless steel**<br>EAN-13: 8413880089348<br>Silence · high power | Wall-mounted, 90 cm<br>• Extraction motor: 920 m³/h free outlet<br>• At 15 Pa pressure according to the UNE-EN-61591: 720 m³/h<br>• 3 extraction speeds + 1 intensive speed<br>• Electronic Touch Controls<br>• Interior motor locking (easy-to-clean)<br>• Filter saturation LEDs<br>• Halogen lighting (2 halogen lamps)<br>• 3 easy-to-clean multi-layer modular metallic filters<br>• Carbon filter (optional) |  |
| <br>**5CFB-120 X**<br>**stainless steel**<br>EAN-13: 8413880142623<br>**5CFB-90 X**<br>**stainless steel**<br>EAN-13: 8413880142616<br>**5CFB-70 X**<br>**stainless steel**<br>EAN-13: 8413880142609<br>**5CFB-60 X**<br>**stainless steel**<br>EAN-13: 8413880142593<br>Silence · high power | Wall-mounted, 120 / 90 / 70 / 60 cm<br>• Extraction motor: 870 m³/h free outlet<br>• At 15 Pa pressure according to the UNE-EN-61591: 670 m³/h<br>• 3 extraction speeds + 1 intensive speed<br>• Automatic stop after 5 minutes at intensive speed<br>• Electronic Touch Controls<br>• Interior motor locking (easy-to-clean)<br>• LED Indicators (speeds, timing and filter saturation)<br>• Automatic shut-off<br>• Lighting (halogen lamps)<br>• Easy-to-clean multi-layer modular metallic filters<br>• Carbon filter (optional) | 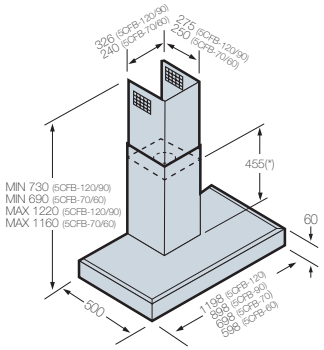 |

Heights given in mm.
(*) Maximum height for motor location.

# Chimneys

| Model and EAN | Specifications | Diagrams and measurements |
|---|---|---|
| <br>**5CDB-90 X**<br>**stainless steel**<br>EAN-13: 8413880142586<br><br>**5CDB-70 X**<br>**stainless steel**<br>EAN-13: 8413880142579<br><br>**5CDB-60 X**<br>**stainless steel**<br>EAN-13: 8413880142562 | Wall-mounted, 90 / 70 / 60 cm<br><br>• Extraction motor: 740 m³/h free outlet<br>• At 15 Pa pressure according to the UNE-EN-61591: 570 m³/h<br>• 3 Extraction speeds + 1 Pilot light<br>• Mechanical control buttons<br>• Interior motor locking (easy-to-clean)<br>• Lighting (2 lamps)<br>• Easy-to-clean multi-layer modular metallic filters<br>• Carbon filter (optional) |  |
| <br>**5CDC-90 X** new<br>**stainless steel**<br>EAN-13: 8413880142531<br><br>**5CDC-70 X** new<br>**stainless steel**<br>EAN-13: 8413880142500<br><br>**5CDC-60 X** new<br>**stainless steel**<br>EAN-13: 8413880142463<br><br>**5CDC-60 B** new<br>**white**<br>EAN-13: 8413880142487<br><br>**5CDC-60 N** new<br>**black**<br>EAN-13: 8413880142494 | Wall-mounted, 90 / 70 / 60 cm<br><br>• Extraction motor: 650 m³/h free outlet<br>• At 15 Pa pressure according to the UNE-EN-61591: 430 m³/h<br>• 3 Extraction speeds + 1 Pilot light<br>• Mechanical control buttons<br>• Lighting (2 lamps)<br>• 2 easy-to-clean multi-layer modular metallic filters<br>• Carbon filter (optional) |  |
| <br>**CHF-90 X** new<br>**stainless steel**<br>EAN-13: 8413880165509<br><br>**CHF-70 X** new<br>**stainless steel**<br>EAN-13: 8413880165516<br><br>**CHF-60 X** new<br>**stainless steel**<br>EAN-13: 8413880165523 | Wall-mounted, 90 / 70 / 60 cm<br><br>• Extraction motor: 400 m³/h free outlet<br>• At 15 Pa pressure according to the UNE-EN-61591: 390 m³/h<br>• 3 extraction speeds<br>• Mechanical control buttons<br>• Lighting (2 lamps)<br>• Easy-to-clean multi-layer modular metallic filters<br>• Carbon filter (optional) |  |
| <br>**CRC-90 I**<br>**stainless steel**<br>EAN-13: 8413880071541 | Wall-mounted, 90 cm<br><br>• Extraction motor: 650 m³/h free outlet<br>• At 15 Pa pressure according to the UNE-EN-61591: 540 m³/h<br>• 3 Extraction speeds + 1 Pilot light<br>• Mechanical slider controls<br>• Lighting (2 lamps)<br>• 2 easy-to-clean multi-layer modular metallic filters<br>• Carbon filter (optional) |  |

Heights given in mm.
(*) Maximum height for motor location.

| Model and EAN | Specifications | Diagrams and measurements |
|---|---|---|
| **CRC-90 N Epoca**<br>**black anthracite**<br>EAN-13: 8413880071558 | Wall-mounted, 90 cm Epoca<br>• Extraction motor: 650 m³/h free outlet<br>• At 15 Pa pressure according to the UNE-EN-61591: 540 m³/h<br>• 3 Extraction speeds + 1 Pilot light<br>• Mechanical slider controls<br>• Lighting (2 lamps)<br>• 2 easy-to-clean multi-layer modular metallic filters<br>• Carbon filter (optional) | 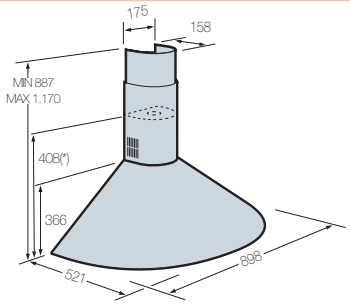 <br>Heights given in mm.<br>(*) Maximum height for motor location. |

# Cooker hoods'

| | | |
|---|---|---|
| **AF3-647 X**<br>**stainless steel front**<br>EAN-13: 8413880126760<br><br>**AF3-647 N**<br>**black**<br>EAN-13: 8413880126753<br><br>**AF3-647 B**<br>**white**<br>EAN-13: 8413880126746 | 60 cm Extra Flat<br>• Extraction motor: 590 m³/h free outlet<br>• At 15 Pa pressure according to the UNE-EN-61591: 405 m³/h<br>• Mechanical slider controls (3 extraction speeds)<br>• Automatic motor cut-off<br>• Interior motor locking (easy-to-clean)<br>• Lighting (2 lamps)<br>• 2 easy-to-clean multi-layer modular metallic filters<br>• Carbon filter (optional) | Heights given in mm.<br> 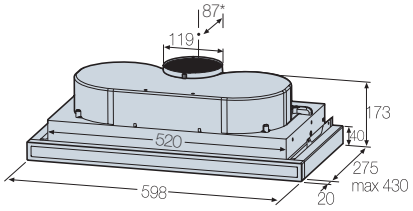 <br>* Size from the centre of the centre de flue outlet to the rear of the hood |
| **4CC-130 EX** new<br>**stainless steel front**<br>EAN-13: 8413880126982 | 90 cm Extra Flat<br>• Extraction motor: 330 m³/h free outlet<br>• At 15 Pa pressure according to the UNE-EN-61591: 210 m³/h<br>• Mechanical slider controls<br>• Metallic filter with filter support grille<br>• Carbon filter (optional) | Heights given in mm.<br> 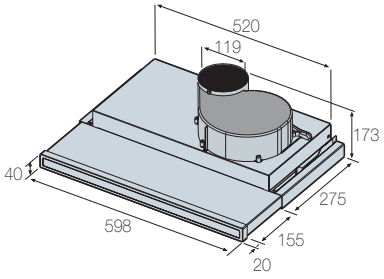 |
| **3CC-239 EX**<br>**stainless steel front**<br>EAN-13: 8413880089096 | 90 cm Extra Flat<br>• 2 extraction motors<br>• Extraction motor: 550 m³/h free outlet<br>• At 15 Pa pressure according to the UNE-EN-61591: 370 m³/h<br>• Mechanical slider controls (3 extraction speeds)<br>• Automatic motor cut-off<br>• Lighting (2 lamps)<br>• 2 easy-to-clean multi-layer modular metallic filters<br>• Carbon filter (optional) | Heights given in mm.<br> 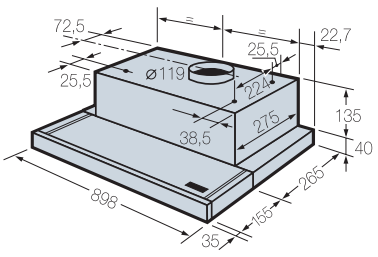 |

# Cooker hoods'

| Model and EAN | Specifications | Diagrams and measurements |
|---|---|---|
| <br>**CC-239 X**<br>**stainless steel front**<br>EAN-13: 8413880089027 | Conventional 90 cm<br>• Extraction motor: 450 m³/h free outlet<br>• At 15 Pa pressure according to the UNE-EN-61591: 350 m³/h<br>• Mechanical slider controls (3 extraction speeds)<br>• 2 extraction motors<br>• Lighting (2 lamps)<br>• Carbon filter (optional) | Heights given in mm.<br> 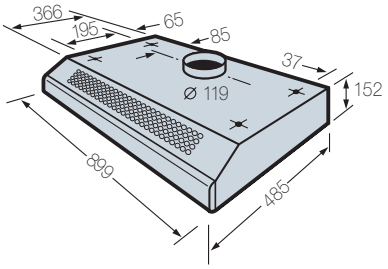 |
| <br>**AF3-607 X**<br>**stainless steel body**<br>EAN-13: 8413880126739<br>**AF3-607 B**<br>**white**<br>EAN-13: 8413880126715<br>**AF3-607 N**<br>**black**<br>EAN-13: 8413880126722 | Conventional 60 cm<br>• Extraction motor: 510 m³/h free outlet<br>• At 15 Pa pressure according to the UNE-EN-61591: 400 m³/h<br>• Control buttons (3 speeds)<br>• Lighting (2 lamps)<br>• 2 easy-to-clean multi-layer modular metallic filters<br>• Carbon filter (optional) | Heights given in mm.<br>  |
| <br>**1CCP-130 X** New<br>**stainless steel**<br>EAN-13: 8413880126920<br>**1CCP-130 B** New<br>**white**<br>EAN-13: 8413880126906 | Conventional 60 cm<br>• Extraction motor: 350 m³/h free outlet<br>• At 15 Pa pressure according to the UNE-EN-61591: 225 m³/h<br>• Mechanical slider controls (3 extraction speeds)<br>• 1 extraction motor<br>• 2 easy-to-clean multi-layer modular metallic filters<br>• Lighting (1 lamp)<br>• Carbon filter (optional) | Heights given in mm.<br>  |
| <br>**AF3-617 IX**<br>**stainless steel look**<br>EAN-13: 8413880155272 | 60 cm built-in<br>• Extraction motor: 510 m³/h free outlet<br>• At 15 Pa pressure according to the UNE-EN-61591: 460 m³/h<br>• Mechanical slider controls (3 extraction speeds)<br>• 2 extraction motors<br>• Lighting (2 lamps)<br>• 1 easy-to-clean multi-layer modular metallic filters<br>• Carbon filter (optional) | Heights given in mm.<br>  |

# Canopy hoods'

| Model and EAN | | Specifications | Diagrams and measurements |
|---|---|---|---|
| | **AF2-627 IX**<br>**stainless steel look**<br>EAN-13: 8413880098517 | 60 cm canopy hoods<br><br>• Extraction motor: 580 m³/h free outlet<br>• At 15 Pa pressure according to the UNE-EN-61591: 390 m³/h<br>• Mechanical slider controls (3 extraction speeds)<br>• 2 extraction motors<br>• Automatic motor cut-off<br>• Removable front for panelling<br>• Lighting (2 lamps)<br>• 2 easy-to-clean multi-layer modular metallic filters<br>• Carbon filter (optional) | Heights given in mm.<br> 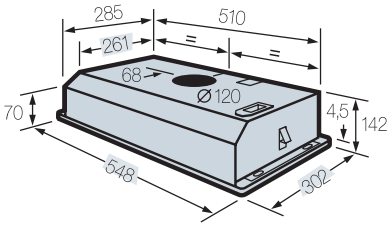 |

# Chimneys’

| | | ISLAND | | WALL MOUNTED | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | 3CFT-90 V Isla | 5CFB-100 X Isla | 3CFT-TILE | 3CFT-DEEP90 X | 3CFT-9 BRS X | 3CFT-9 S X | 3CFT-90 V | 3CFT-MAYA | 5CFB-120 X | 5CFB-90 X | 5CFB-70 X |
| **GENERAL FEATURES** | | | | | | | | | | | | |
| Number of motors | | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| Double turbine motor (high performance) | | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● |
| Mounting | Wall-mounted | | | ● | ● | ● | ● | ● | ● | ● | ● | ● |
| | Ceiling-mounted | ● | ● | | | | | | | | | |
| Heat-humidity sensor / heat-temperature sensor | | | | | | -/● | ●/- | | | | | |
| Check valve | | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● |
| Fume outlet | | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● |
| Electric power cord | | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● |
| **TECHNICAL SPECIFICATIONS** | | | | | | | | | | | | |
| Speed setting display | | | ● | ● | ● | | ● | | | ● | ● | ● |
| Automatic shut-off | | | ● | ● | ● | ● | ● | | | ● | ● | ● |
| **TECHNICAL SPECIFICATIONS** | | | | | | | | | | | | |
| Total power (W) | | 280 | 215 | 290 | 290 | 215 | 310 | 240 | 255 | 215 | 215 | 215 |
| Potencia motor (W) | | 200 | 175 | 250 | 250 | 175 | 270 | 200 | 215 | 175 | 175 | 175 |
| Lighting (W) | | 80 | 40 | 40 | 40 | 40 | 40 | 40 | 40 | 40 | 40 | 40 |
| Noise level dB(A) at speeds 1 and 3 | | 50-64 | 46-62 | 45-59 | 35-49,5 | 51-59 | 48,7-69 | 50-64 | 53-65 | 46-62 | 46-62 | 46-62 |
| Voltage / Frequency (V/Hz) | | 230/50 | 230/50 | 230/50 | 230/50 | 230/50 | 230/50 | 230/50 | 230/50 | 230/50 | 230/50 | 230/50 |
| Fume outlet pipe (diameter in mm.) | | 120 | 120 | 120 | 120 | 120 | 120 | 120 | 120 | 120 | 120 | 120 |
| **ACCESSORIES** | | | | | | | | | | | | |
| Carbon filter (optional) | | ● | ● | Serie | ● | ● | ● | ● | ● | ● | ● | ● |
| Recycling option | | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● |

| | WALL MOUNTED | | | | | | | | | | ROUND CHIMNEYS | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | 5CFB-60 X | 5CDB-90 X | 5CDB-70 X | 5CDB-60 X | 5CDC-90 X | 5CDC-70 X | 5CDC-60 X<br>5CDC-60 B<br>5CDC-60 N | CHF-90 X | CHF-70 X | CHF-60 X | CRC-90 I | CRC-90 N<br>EPOCA | |
| **GENERAL FEATURES** | | | | | | | | | | | | | |
| Number of motors | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | |
| Double turbine motor (high performance) | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | |
| Mounting: Wall-mounted | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | |
| Mounting: Ceiling-mounted | | | | | | | | | | | | | |
| Heat-humidity sensor / heat-temperature sensor | | | | | | | | | | | | | |
| Check valve | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | |
| Fume outlet | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | |
| Electric power cord | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | |
| **TECHNICAL SPECIFICATIONS** | | | | | | | | | | | | | |
| Speed setting display | ● | | | | | | | | | | | | |
| Automatic shut-off | ● | | | | | | | | | | | | |
| **TECHNICAL SPECIFICATIONS** | | | | | | | | | | | | | |
| Total power (W) | 215 | 260 | 260 | 260 | 260 | 260 | 260 | 180 | 180 | 180 | 250 | 250 | |
| Potencia motor (W) | 175 | 180 | 180 | 180 | 180 | 180 | 180 | 100 | 100 | 100 | 170 | 170 | |
| Lighting (W) | 40 | 80 | 80 | 80 | 80 | 80 | 80 | 80 | 80 | 80 | 80 | 80 | |
| Noise level dB(A) at speeds 1 and 3 | 46-62 | 45-65 | 45-65 | 45-65 | 46-62 | 46-62 | 46-62 | 65 | 65 | 65 | 48-69 | 48-69 | |
| Voltage / Frequency (V/Hz) | 230/50 | 230/50 | 230/50 | 230/50 | 230/50 | 230/50 | 230/50 | 230/50 | 230/50 | 230/50 | 230/50 | 230/50 | |
| Fume outlet pipe (diameter in mm.) | 120 | 120 | 120 | 120 | 120 | 120 | 120 | 120 | 120 | 120 | 120 | 120 | |
| **ACCESSORIES** | | | | | | | | | | | | | |
| Carbon filter (optional) | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | |
| Recycling option | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | |

# Cooker hoods and canopy hoods’

| | | EXTRA FLAT | | | | CONVENTIONALS | | BUILT-IN | CANOPY |
|---|---|---|---|---|---|---|---|---|---|
| | | AF3-647 X<br>AF3-647 B<br>AF3-647 N | 3CC-239 E X | CC-239 E X | 4CC-130 E X | AF3-607 X<br>AF3-607 B<br>AF3-607 N | 1CCP-130 X<br>1CCP-130 B | AF3-617 IX | AF2-627 IX |
| **GENERAL FEATURES** | | | | | | | | | |
| Motor HP (High Performance) | | | | | | ● | | | |
| Removable front for panelling | | | | | | | | ● | |
| Mounting | Wall-mounted | | | | | | | ● | |
| | Built-in | ● | ● | ● | ● | | ● | | ● |
| | Built-in or wall mounted | | | | | ● | ● | | |
| Check valve | | ● | ● | ● | ● | ● | ● | ● | ● |
| Fume outlet | | ● | ● | ● | ● | ● | ● | ● | ● |
| Electric power cord | | ● | ● | ● | ● | ● | ● | ● | ● |
| Recycling option (1) | | ● | ● | ● | ● | ● | ● | ● | ● |
| **TECHNICAL SPECIFICATIONS** | | | | | | | | | |
| Total power (W) | | 330 | 330 | 330 | 200 | 270 | 139 | 360 | 360 |
| Motor power (W) | | 250 | 2x125 | 125 | 120 | 190 | 99 | 240 | 240 |
| Lighting (W) | | 80 | 80 | 80 | 80 | 80 | 40 | 80 | 80 |
| Fume outlet pipe (diameter in mm.) | | 120 | 120 | 120 | 120 | 125 | 125 | 120 | 120 |
| Noise level dB(A) at speeds 1 and 3 | | 55-69 | 58-67 | 58-67 | 45 | 59-69 | 45 | 48-65 | 55-71 |
| Voltage / Frequency (V/Hz) | | 230/50 | 220-240/50 | 220-240/50 | 230/50 | 230/50 | 230/50 | 230/50 | 230/50 |
| **ACCESSORIES** | | | | | | | | | |
| Carbon filter (optional) | | ● | ● | ● | ● | ● | ● | ● | ● |

(1) The recycling option is available for the AF3-617, AF3-607, AF3-647, and 3CC-239 E models providing the outlet pipe reaches up to the top of the unit.

# Chimneys, cooker hoods and canopy hood' accessories



| | Model, Code and EAN | Specifications |
|---|---|---|
| 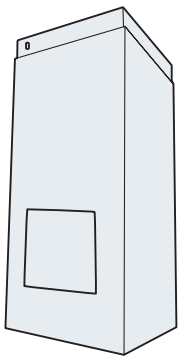 | **ATC-400 X** (stainless steel)<br>Code 989990257<br>EAN-13: 8413880142999 | **Chimney tube** (optional accessory). Dimensions (fixed part 40 cm. / mobile part 45,5 cm.)<br>Stainless steel style. Can be installed in the following chimneys:<br>5CDC-90 X, 5CDC-70 X and 5CDC-60 X<br>Required quantity: 1 |
| | **ATC-545 X** (stainless steel)<br>Code 989990266<br>EAN-13: 8413880143385 | **Chimney tube** (optional accessory). Dimensions (fixed part 54,5 cm. / mobile part 30 cm.)<br>Stainless steel style. Can be installed in the following chimneys:<br>5CDB-60 X, 5CDB-70 X and 5CDB-90 X<br>Required quantity: 1 |
| | **ATC-TI X** (stainless steel)<br>Code 989990532<br>EAN-13: 8413880157078 | **Chimney tube** (optional accessory). Dimensions (fixed part 54 cm. / mobile part 58 cm.)<br>Stainless steel style. Can be installed in the following chimneys:<br>3CFT-TILE.<br>Required quantity: 1 |
| | **ATC-ISLA X** (stainless steel)<br>Code 989990596<br>EAN-13: 8413880161952 | **Chimney tube** (optional accessory). Dimensions (fixed part 63 cm. / mobile part 61,5 cm.)<br>Stainless steel style. Can be installed in the following chimneys:<br>3CFT-90V ISLA.<br>Required quantity: 1 |
|  | **AFC-10**<br>Code 989990373<br>EAN-13: 8413880128153 | Optional accessory. **Carbon filter.** Can be installed in the following cooker hoods:<br>AF3-607 B, AF3-607 N, AF3-607 X, 1CCP 130 X and 1CCP 130 B.<br>Required quantity: 1 |
| | **AFC-12**<br>Code 989990060<br>EAN-13: 8413880142968 | Optional accessory. **Carbon filter.** Can be installed in the following chimneys:<br>5CDC-60 B, 5CDC-60 N, 5CDC-60 X, 5CDC-70 X and 5CDC-90 X<br>Required quantity: 1 |
| | **AFC-15**<br>Code 989990382<br>EAN-13: 8413880128160 | Optional accessory. **Carbon filter.** Can be installed in the following chimneys:<br>3CFT-MAYA, 5CFB-120 X, 5CFB-90 X, 5CFB-70 X, 5CFB-60 X, 5CDB-90 X, 3CFT-9BRS,<br>5CDB-70 X, 5CDB-60 X and 5CFB-100 X Isla.<br>Required quantity: 1 |
| | **AFC-29**<br>Code 989990417<br>EAN-13: 8413880128290 | Optional accessory. **Carbon filter.** Can be installed in the following cooker hood:<br>AF3-617 IX<br>Required quantity: 1 |
| | **AFC-30**<br>Code 9899900202<br>EAN-13: 8413880071978 | Optional accessory. **Carbon filter.** Can be installed in the following cooker hood:<br>CC-239 X<br>Required quantity: 2 |
| | **AFC-31**<br>Code 989990364<br>EAN-13: 8413880107905 | Optional accessory. **Carbon filter.** Can be installed in the following chimney:<br>3CFT-TILE<br>Required quantity: 1 |
| | **AFC-55**<br>Code 989010011<br>EAN-13: 8413880158389 | Optional accessory. **Carbon filter.** Can be installed in the following chimneys:<br>CHF-90 X, CHF-70 X and CHF-60 X.<br>Required quantity: 1 |
| | **AFC-58**<br>Code 989990603<br>EAN-13: 8413880163796 | Optional accessory. **Carbon filter.** Can be installed in the following chimney:<br>3CFT-DEEP 90 X<br>Required quantity: 1 |
| | **AFC-150**<br>Code 989990202<br>EAN-13: 8413880071978 | Optional accessory. **Carbon filter.** Can be installed in the following cooker hood:<br>AF2-627 IX.<br>Required quantity: 1 |
| | **AFC-160**<br>Code 989990220<br>EAN-13: 8413880071992 | Optional accessory. **Carbon filter.** Can be installed in the following chimneys:<br>3CFT-90 V and 3CFT-90 V Isla.<br>Required quantity: 1 |
| | **AFC-200**<br>Code 989990211<br>EAN-13: 8413880071985 | Optional accessory. **Carbon filter.** Can be installed in the following chimneys:<br>CRC-90 I, CRC-90 N Epoca.<br>Required quantity: 1 |
| | **AFC-303**<br>Code 989990195<br>EAN-13: 8413880071961 | Optional accessory. **Carbon filter.** Can be installed in the following cooker hoods:<br>3CC-239 E X, AF3-647 B, AF3-647 N, AF3-647 X and 4CC-130 EX.<br>Required quantity: 2 |
| | **AK505AE1**<br>Code 989580271<br>EAN-13: 3660767526778 | Optional accessory. **Carbon filter.** Can be installed in the following chimney:<br>3CFT-9 SX<br>Required quantity: 1 |

Fagor Electrodomésticos, S. Coop.
Tel.  943 03 71 00
Fax 943 03 71 19
Barrio San Andrés, 18
20500 MONDRAGÓN (Gipuzkoa)
www.fagor.com
info@fagor.com